




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B65B 21/06, B65G 47/08, 37/00	A1	(11) International Publication Number: WO 99/14122 (43) International Publication Date: 25 March 1999 (25.03.99)
<p>(21) International Application Number: PCT/US98/19651</p> <p>(22) International Filing Date: 21 September 1998 (21.09.98)</p> <p>(30) Priority Data: 9719949.1 19 September 1997 (19.09.97) GB</p> <p>(71) Applicant (for all designated States except US): THE MEAD CORPORATION [US/US]; Courthouse Plaza, Northeast, Dayton, OH 45463 (US).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): BONNAIN, Jean-Christophe [FR/FR]; 14, rue du Marechal Juin, F-36000 Chateauroux (FR). DUSSART, Jean-Jacques [FR/FR]; Appartement 44, 5, rue de la Bièvre, F-36000 Chateauroux (FR).</p> <p>(74) Agents: BOSHINSKI, Thomas, A. et al.; The Mead Corporation, 4850D North Church Lane, Smyrna, GA 30080 (US).</p>	<p>(81) Designated States: AU, BR, BY, CA, CN, CZ, EE, HU, ID, IL, JP, KE, KR, LT, LV, MX, NO, NZ, PL, RO, RU, SG, SK, TR, US, VN, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published With international search report.</p>	

(54) Title: ARTICLE GROUPING MECHANISM

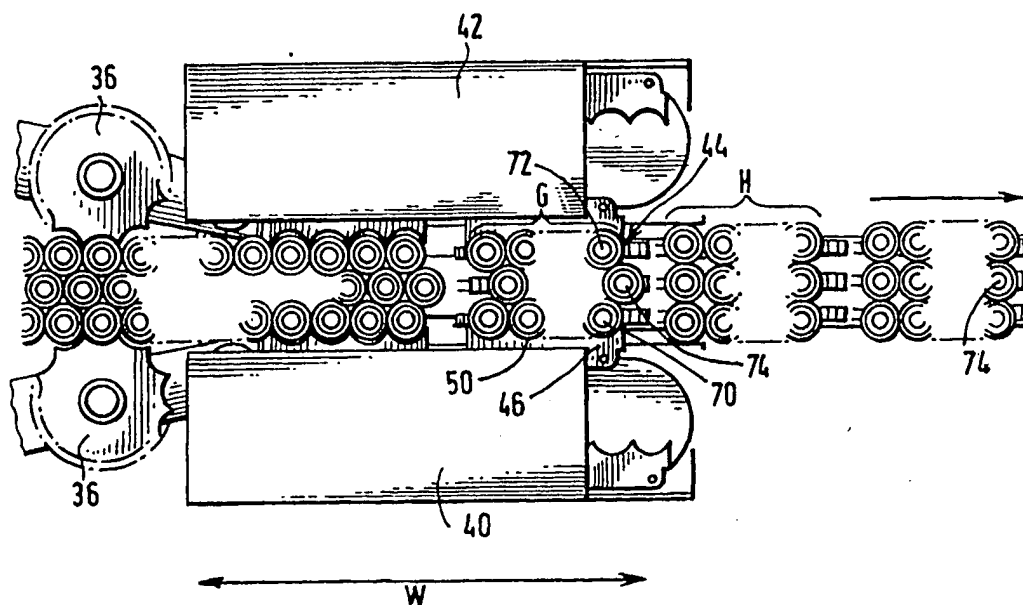

(57) Abstract

A grouping mechanism and method for grouping articles delivered to the mechanism from an infeed stream at an infeed end of a packaging machine, which mechanism comprises a pair of opposed spacer elements, each said spacer element adapted to engage at least one article from the infeed stream and to convey said article through a working reach of said mechanism and transfer means being provided to return each said spacer element along a return reach such that they are returned upstream of said working reach.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

ARTICLE GROUPING MECHANISM

5 This invention relates to packaging of primary articles such as cans and bottles in multiple packaged cartons and is more particularly concerned with feeding such cartons from a hopper and for initiating and then completing a loading operation of cartons in sequence.

10 A majority of known packaging machines are dedicated machines which construct only one type of carton. Therefore, modern bottling plants are required to use a plurality of packaging machines to package different carton types, each machine taking up considerable floor space and being expensive to both purchase and operate.

15 A limited number of packaging machines are capable of packaging different sizes of one carton, for example, six, eight or twelve bottles of a wraparound carton. All such machines require adjustment when switching from one size or type of carton to another. This adjustment includes the manual removal of all of the cartons within the packaging machine and possibly the mechanical adjustment of components in the machine. During this changeover period, which can be thirty minutes or more, a machine cannot be used (known as "downtime"), which is an expensive delay in a bottling plant. Such a delay may even result in downtime for the entire bottling line, not just the packaging machine, if problems arise during the changeover procedure.

20

The present invention can be used with a packaging machine described in a corresponding application (applicant's reference D-7725). It is envisaged that the present invention can be used in various other types of packaging machine. Alternatively, the grouping mechanism of the present invention can be sold as an individual module to be fitted to new equipment or to existing equipment on a retro fit basis.

25

- 2 -

More particularly, this invention relates to a mechanism for grouping together a plurality of articles from an infeed stream at an infeed end of a packaging machine and is particularly useful for grouping together a plurality of cans or bottles in a multiple packaging machine.

5 In a known spacer and conveying mechanism disclosed in EP A 0126553 a series of spacer elements are spaced apart at fixed locations on the endless chains, each spacer element being configured to engage a plurality of articles from an infeed stream of articles and convey those articles downstream of the machine. The spacing between each spacer element corresponds to the spacing between
10 successive groups of articles. GB A 974 995 discloses a grouping mechanism for grouping articles into package units which comprises a first pair of chains which have lugs spaced apart at fixed intervals for engaging articles at an infeed end of the apparatus. The pair of chains are mounted on opposite sides of a pair of fixed support plates which together with the lugs cooperate to divide the array of articles
15 at the infeed into groups of fixed separation and propel the groups towards a second pair of chains also having lugs spaced apart at fixed intervals. The second pair of chains has a greater downstream velocity compared to the first pair of chains. The upstream article of a group of articles is engaged by a lug of the second pair of chains thereby forcing the groups of articles forward at a greater
20 speed than that determined by the first pair of chains.

 The present invention seeks to overcome the commercial disadvantages of known packaging machines and spacing mechanism by providing a grouping mechanism which is able to group articles for loading into more than one type of carton. Further, the invention is capable of switching from one configuration of
25 grouped articles to another for loading into different carton types or sizes with minimum downtime. Further, the modular nature of the present invention enables a "fully flexible" machine to be constructed which overcomes, or at least mitigates, the problems of known machines.

One aspect of the invention provides a grouping mechanism for grouping articles to be loaded into a carton and delivered to the mechanism from an infeed stream at an infeed end of a packaging machine, which mechanism comprises a pair of opposed spacer elements, each said spacer element adapted to engage at
5 least one article from the infeed stream and to convey said article through a working reach of said mechanism and transfer means being provided to return each said spacer element along a return reach such that they are returned upstream of said working reach.

According to an optional feature of this aspect of the invention, said spacer
10 element comprises a part cylindrical recess to receive a portion of said article being conveyed.

According to another optional feature of this aspect of the invention, adjustment means is provided to increase the spacing between said spacer elements whereby a third article intermediate and juxtaposed said engaged articles is
15 conveyed by said spacer elements.

According to yet another optional feature of this aspect of the invention, said third article may lead said engaged articles during the working reach and wherein article alignment means may be provided to move said third article into lateral alignment with said engaged articles when said engaged articles are
20 disengaged from said spacer element.

According to still another optional feature of this aspect of the invention, said article alignment means may be provided by opposed panels of said carton in contact with said articles to guide said articles into alignment.

According to a further optional feature of this aspect of the invention each
25 said spacer elements is mounted on a cam track, wherein each said cam track

- 4 -

provides a path for said spacer elements to maintain said recesses parallel to said articles during said engagement.

According to an yet another optional feature of this aspect of the invention said spacer element further comprises a second part cylindrical recess to receive a
5 portion of a second article to be conveyed in a grouped arrangement with said first article.

According to another optional feature of this aspect of the invention regulating means is provided to control the flow of articles at said infeed end, said regulating means further comprising means to control the pressure of said articles
10 into the machine and means to determine the correct number of articles for each carton.

According to yet another optional feature of this aspect of the invention said means to control the pressure of said articles comprises an infeed star wheel.

Another aspect of the invention provides a method comprises engaging
15 successive articles with spacer elements from the infeed stream so that those articles are located relative to one another during feed movement of the articles so that one group of articles becomes advanced with respect to and thereby spaced from the next succeeding group of articles while the spacer elements move along the feed path of said articles and thereafter, returning the spacer elements upstream
20 such that they are appropriately spaced one from the next for engagement with successive articles in said infeed stream.

According to an optional feature of this aspect of the invention said group of articles comprise two rows having at least one article in each said row.

According to another optional feature of this aspect of the invention said
25 group of articles comprise two outer rows advanced by said spacer elements and a

- 5 -

central row intermediate said outer rows, each said row having at least one article and further comprising the step that said central row abuts a leading portion of an article of each said advancing outer row thereby to advance said central row.

5 According to still another optional feature of this aspect of the invention, after the articles leave engagement with said spacer elements may further comprise the step of moving the outer rows and central row into lateral alignment for loading into a carton.

An embodiment of the invention will now be described by way of example with reference to the accompanying drawings in which:

10 FIGURE 1 is a perspective view of an upstream end of a packaging machine incorporating the article grouping mechanism of the present invention;

FIGURE 2 is a perspective view illustrating the article grouping mechanism of the present invention;

15 FIGURE 3 is an exploded view of the support platform used with the article grouping mechanism of the invention

FIGURE 4 is a plan view of the article grouping mechanism for two rows; and

FIGURE 5 is a plan view of the article grouping mechanism for three rows.

20 A machine according to the present invention is capable of grouping articles in different configurations for loading in a variety of carton types, for example, fully enclosed, wraparound and basket type cartons. Any reference in this specification to carton type includes different sizes of a particular carton style. For

- 6 -

example, the mechanism can load fully enclosed cartons for eight or twelve articles configured in 2 x 4 and 3 x 4 respectively.

Referring to Figures 1 of the drawings there is shown a machine 10 for packaging cartons formed from a (unitary) blank of paperboard or similar sheet material. The upstream end of the machine includes a dual hopper 12 in which a multiplicity of cartons 14 in a collapsed condition are held ready for processing. A back feeder 16 of the type referred to in corresponding application (Applicant's reference D-7723) and a rotary vacuum feeder 18 are positioned adjacent the dual hopper 12. The rotary vacuum feeder 18 transfers sequentially cartons from the hopper 12 to a paper feed chain 20. The back feeder 16 comes into contact with the carton during its orbital path and separates opposing walls to part erect the carton. A paper feed chain 20 is provided to complete the carton set up and to transfer cartons downstream to the loading station 22.

Thereafter, carton engagement with the paper feed chain 20 is gradually transferred as the cartons move downstream to a pair of side lug chain sets 24 shown in Figure 1. Each side lug chain set 24 is of similar construction and includes endless chains 26 having a plurality of guide pin lugs 28 which engage the opposed panels of the carton 14 to retain it in the set up condition as it moves downstream. The endless chain sets 24 are mounted on table 30 which are downwardly inclined towards the loading station 22.

Articles such as bottles B or cans are fed into the machine 10 by a conveyor for example an infeed conveyor belt 32 moving on a support platform 34. In this embodiment, three conveyors are provided, each conveyor moving one row of articles. The infeed stream of articles in side by side abutting relationship are introduced to the infeed end of a multiple packaging machine. The line pressure of the articles is controlled by a pair of infeed star wheels 36, as is well known. The articles then enter a grouping station 38 which groups the correct number of articles per carton by means of a series of article grouping assemblies 40, 42.

These assemblies 40, 42 also control the flow of the articles so that they can be introduced to the carton at the same rate as the carton flow. Thereafter, the grouped articles are moved to the loading station 22 by means of an article conveyor 44.

5 The construction of the article grouping assemblies 40, 42 outlined above, will now be described with reference to Figures 2 and 3. In this embodiment a grouping assembly 40, 42 is positioned on each side of the article conveyor 44. Both grouping assemblies 40, 42 are identical in construction, and therefore, only the nearside assembly 40 is described in detail. The assembly 40 includes four
10 spacer elements 46 mounted onto an endless chain 48. The spacer element 46 comprises four part cylindrical recesses 50 positioned one to next. Each recess is shaped substantially to conform to a peripheral wall portion of a bottle B or can which the recess is to engage.

 The spacer element 46 is connected to the endless chain 48 by suitable
15 attachment means, for example, a bearing so that the spacer element can rotate about the attachment. Cam followers (not shown) extend from each end of the spacer element. The endless chain 48 is mounted onto a table 52 supported on a platform and base 54.

 As illustrated in Figure 3, the table 52 includes an oval recess 56 to receive
20 the endless chain 48 and a cam track 58, 60 to receive the cam followers. The endless chain set 48 is driven by a motor for example a servo motor, through a drive shaft 49. As each spacer element 46 moves along the path of the cam track 58, 60, the recesses 50 are maintained in a plane parallel to the article conveyor 44. This arrangement allows the spacer elements 46 to be moved laterally,
25 designated by letter X at each end of the table 52 to assist in the smooth engagement and disengagement of the articles B in the recesses 50. In this embodiment, a guard 62 and a guide rail 64 are also provided to minimise unwanted movement of the articles.

- 8 -

It will be understood that the grouping mechanism 40, 42 of the invention has been illustrated with reference to a specific embodiment and that numerous modifications are possible within the scope of the invention. The grouping mechanism is able to process cartons comprising numerous configurations of groups of articles covering a range of carton size and shape, for example, four, six, eight and twelve bottles without undue time being spent in adjusting the mechanism.

Thus, the assemblies are mounted onto platforms which are moveable in a direction designated by letter Y shown in Figures 2 and 4, so that one or both of the assemblies 40, 42 can be moved toward or away from the article conveyor 44 according to whether two or three rows of articles B are required. In this embodiment, the near side assembly is fixed and the far side grouping assembly 42 is moved towards the near side assembly 40 when it is desired to package two rows of articles 70, 72, as shown in Figure 4. The distance between the infeed star wheels is also narrowed to ensure that the article flow is restricted to two rows, and only two of the three article conveyors 44 are operative.

For those cartons requiring three rows of articles, the distance d between each grouping assembly 40, 42 is increased. Likewise, the infeed star wheels can also be moved further apart. For the arrangement shown in Figure 5, the grouping assemblies are used to grip the two outer rows of articles 70, 72 and the articles making up the centre row 74 are positioned in the void between adjacent articles in each of the outer rows 70, 72. As shown in Figure 5, the centre row leads the outer rows by half a bottle/can diameter. Thus, the central row is moved forward to the end of the working reach W by the outer rows of articles 70, 72.

The present invention also provides for adjustment to the number of articles per row by controlling the number of articles being fed by the star wheels 36 into the grouping station 38. It is envisaged that rows of one, two or three articles can be selected by utilising a corresponding number of recesses 50. If it is desired to

increase the number of articles to five or more per row, then the endless chain set 46 illustrated in this embodiment, can be interchanged with another chain set comprising a spacer element with more recesses.

5 The articles gradually leave contact with the gripper assembly 38 and are transferred to the loading station 22 by means of the article conveyor 44.

At the loading station 22 illustrated in Figure 1, the cartons are introduced to the group of articles B from above as the carton 10 and article group G are moved forward in unison. The carton 10 is lowered onto the group G by the downward incline of the endless chains sets. For grouped articles, comprising 10 three rows 70, 72, 74 it is preferred to alter the configuration from that designated by letter G to the configuration designated by letter H achieved by suitable guide means. In this embodiment, the change in configuration is achieved when end panels of the descending carton come into contact with leading and trailing articles, so that panels guide the bottles into lateral and longitudinal alignment as they are 15 loaded into the carton showing in Figure 5 at H. Of course, it is envisaged that the configuration adopted depends upon the type of carton being loaded.

In another class of embodiments, lugs mounted to side chain sets or flight bars, known in the art are introduced to the grouped articles at the end of the working reach W to effect the change in configuration from G to H.

20 Once the cartons have been loaded with articles, they are transferred by means of the article conveyor and/or pressure belt to a further set of endless chains with side lugs which are used to transfer the carton to the outfeed end of the machine. During this stage, the base panels are folded around to the underside of the carton and are interconnected by a locking mechanism known in the art.

25 According to this invention the speed of operation of the apparatus is improved as well as its efficiency and durability as the carton is moved from a

collapsed position to a fully set up condition. Of course, the final set up operation is due in part to engagement with a back feeder and a corner of the carton with the lugs which then affects complete and final set up of a carton whilst being held by the suction cup.

5 While the preferred embodiment described herein is for loading bottles into cartons, it will be recognised that the invention is not limited to cartons for bottles. The invention may be used with machines for packaging cans, paperboard "bricks" and other containers into cartons.

10 Moreover, while the preferred embodiment described herein is shown as part of a machine for loading containers into vertically-loaded sleeve-type carton, the invention is not limited to cartons of this type. As will be recognised by those skilled in the art, the invention may be used with wrap-around or end-loaded cartons.

CLAIMS

1. A grouping mechanism for grouping articles to be loaded into a carton and delivered to the mechanism from an infeed stream at an infeed end of a packaging machine, which mechanism comprises a pair of opposed spacer elements, each said
5 spacer element adapted to engage at least one article from the infeed stream and to convey said article through a working reach of said mechanism and transfer means being provided to return each said spacer element along a return reach such that they are returned upstream of said working reach.
2. A grouping mechanism according to claim 1 wherein said spacer element
10 comprises a part cylindrical recess to receive a portion of said article being conveyed.
3. A grouping mechanism according to claim 1 or claim 2 further comprises adjustment means to increase the spacing between said opposed spacer elements whereby a third article intermediate and juxtaposed said engaged articles is
15 conveyed by said spacer elements.
4. A grouping mechanism according to claim 3 wherein said third article leads said engaged articles during the working reach and wherein article alignment means is provided to move said third article into lateral alignment with said engaged articles when said engaged articles are disengaged from said spacer element.
- 20 5. A grouping mechanism according to claim 4 wherein said article alignment means is provided by opposed panels of said carton in contact with said articles to guide said articles into alignment.
6. A grouping mechanism according to any of claims 1 to 5 wherein each said spacer elements is mounted on a cam track, wherein each said cam track provides a

- 12 -

path for said spacer elements to maintain said recesses parallel to said articles during said engagement.

7. A grouping mechanism according to any of the preceding claims, wherein said spacer element further comprises a second part cylindrical recess to receive a portion of a second article to be conveyed in a grouped arrangement with said first article.

8. A grouping mechanism according to any of the preceding claims, wherein regulating means is provided to control the flow of articles at said infeed end, said regulating means further comprising means to control the pressure of said articles into the machine and means to determine the correct number of articles for each carton.

9. A grouping mechanism according to claim 8 wherein said means to control the pressure of said articles comprises an infeed star wheel.


10. A method of grouping articles delivered from an infeed stream of a packaging machine which method comprises engaging successive articles with spacer elements from the infeed stream so that those articles are located relative to one another during feed movement of the articles so that one group of articles becomes advanced with respect to and thereby spaced from the next succeeding group of articles while the spacer elements move along the feed path of said articles and thereafter, returning the spacer elements upstream such that they are appropriately spaced one from the next for engagement with successive articles in said infeed stream.

11. A method of claim 10 wherein said group of articles comprise two rows having at least one article in each said row.


12. A method of claim 10 wherein said group of articles comprise two outer rows advanced by said spacer elements and a central row intermediate said outer rows, each said row having at least one article and further comprising the step that said central row abuts a leading portion of an article of each said advancing outer row thereby to advance said central row.

5


13. A method of claim 12 after the articles leave engagement with said spacer elements further comprising the step of moving the outer rows and central row into lateral alignment for loading into a carton.

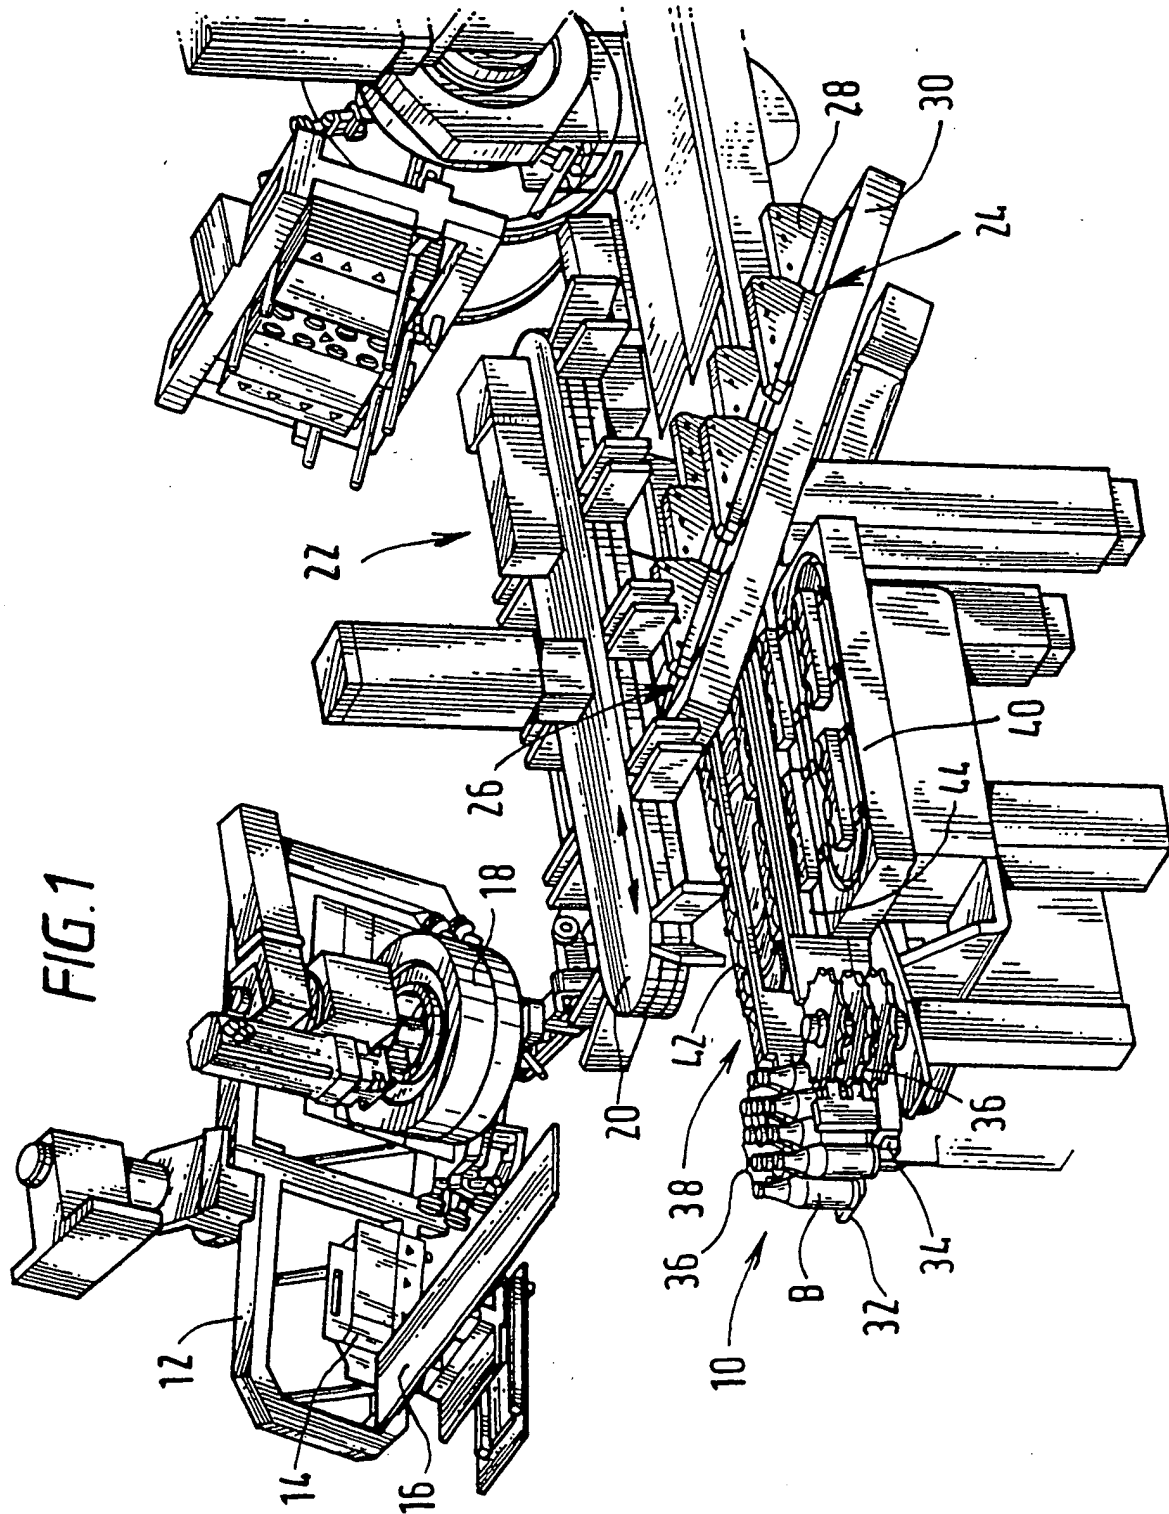


2/5

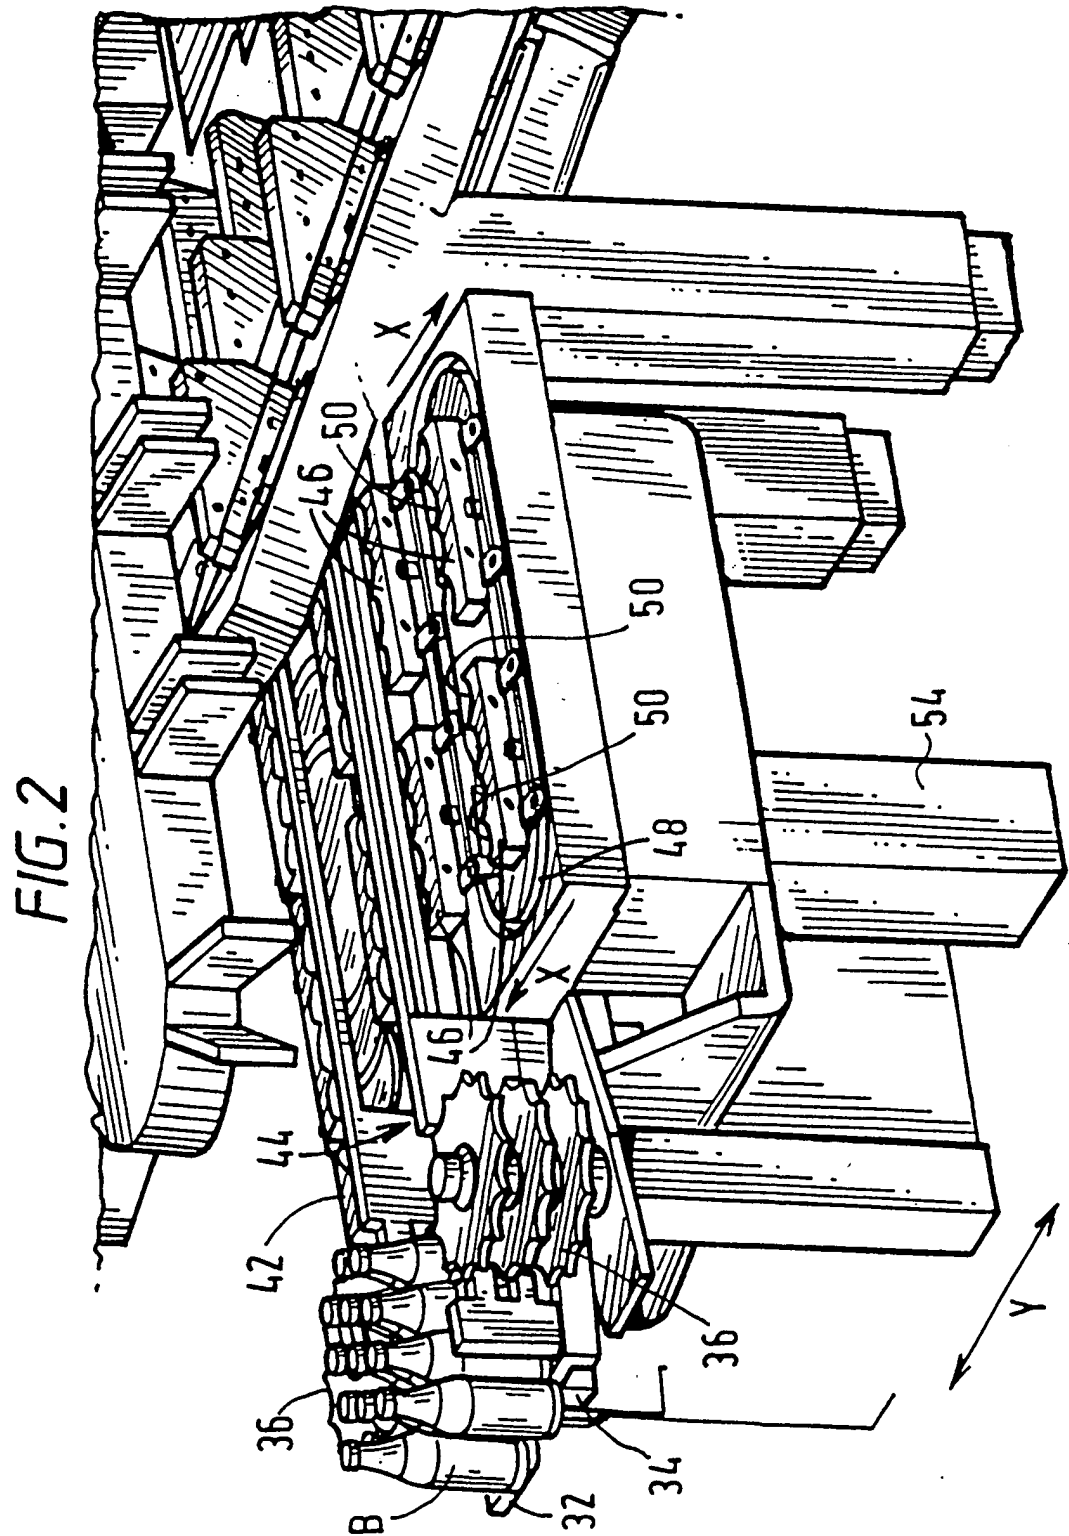


3/5

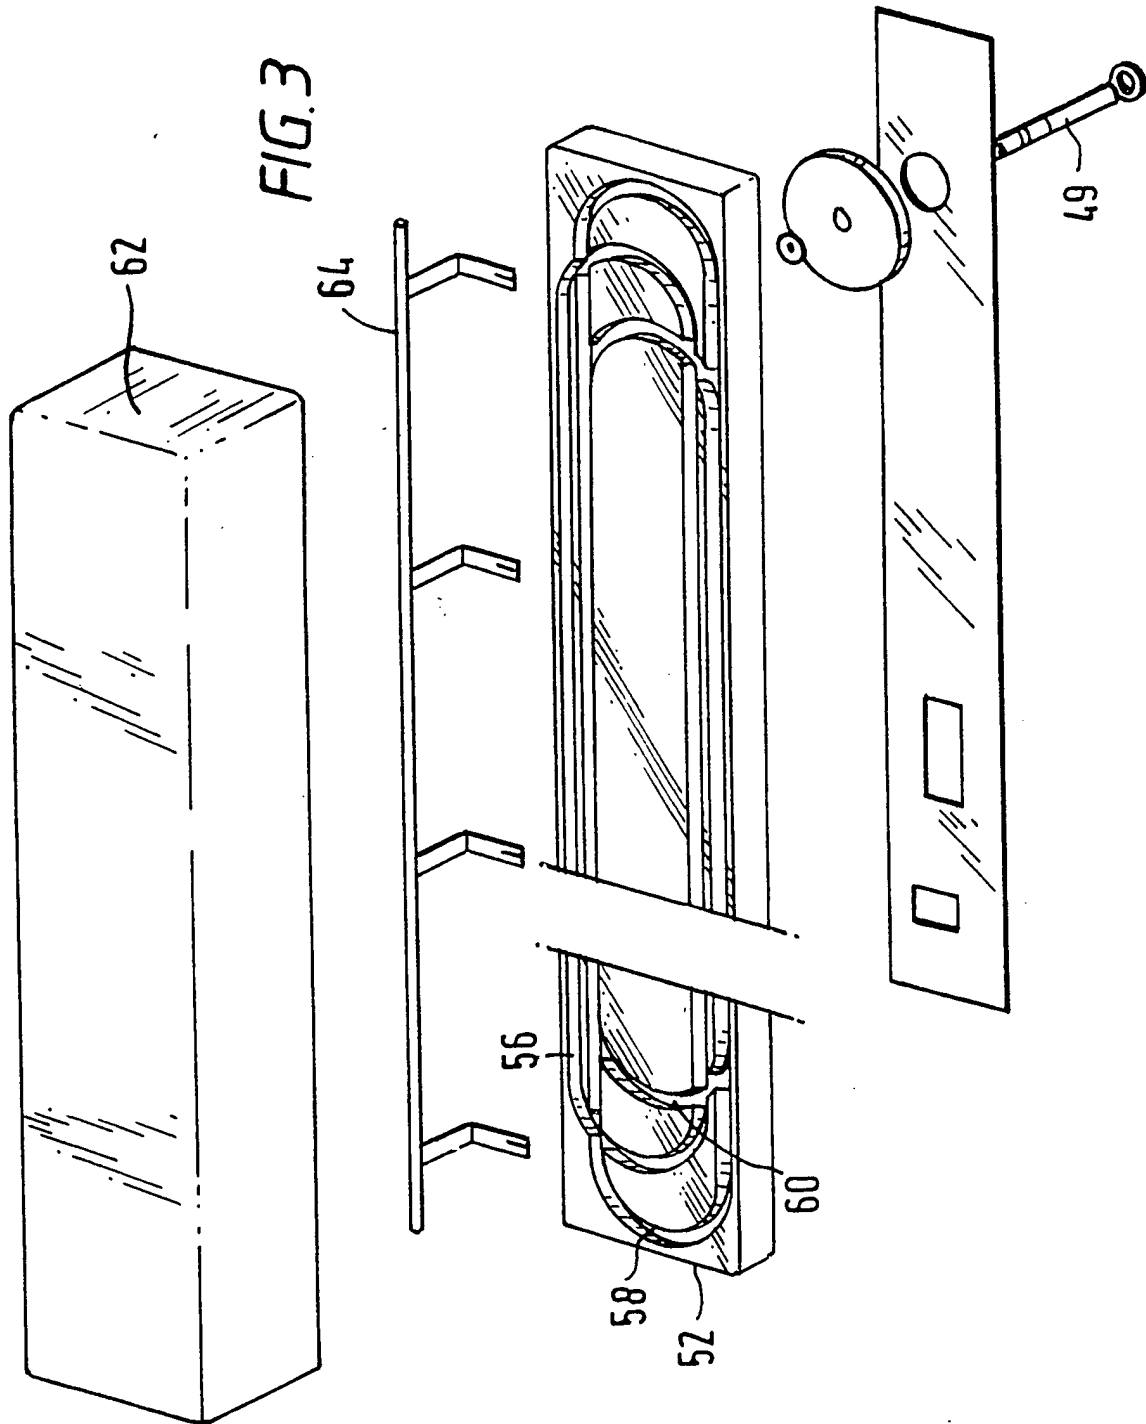

4/5

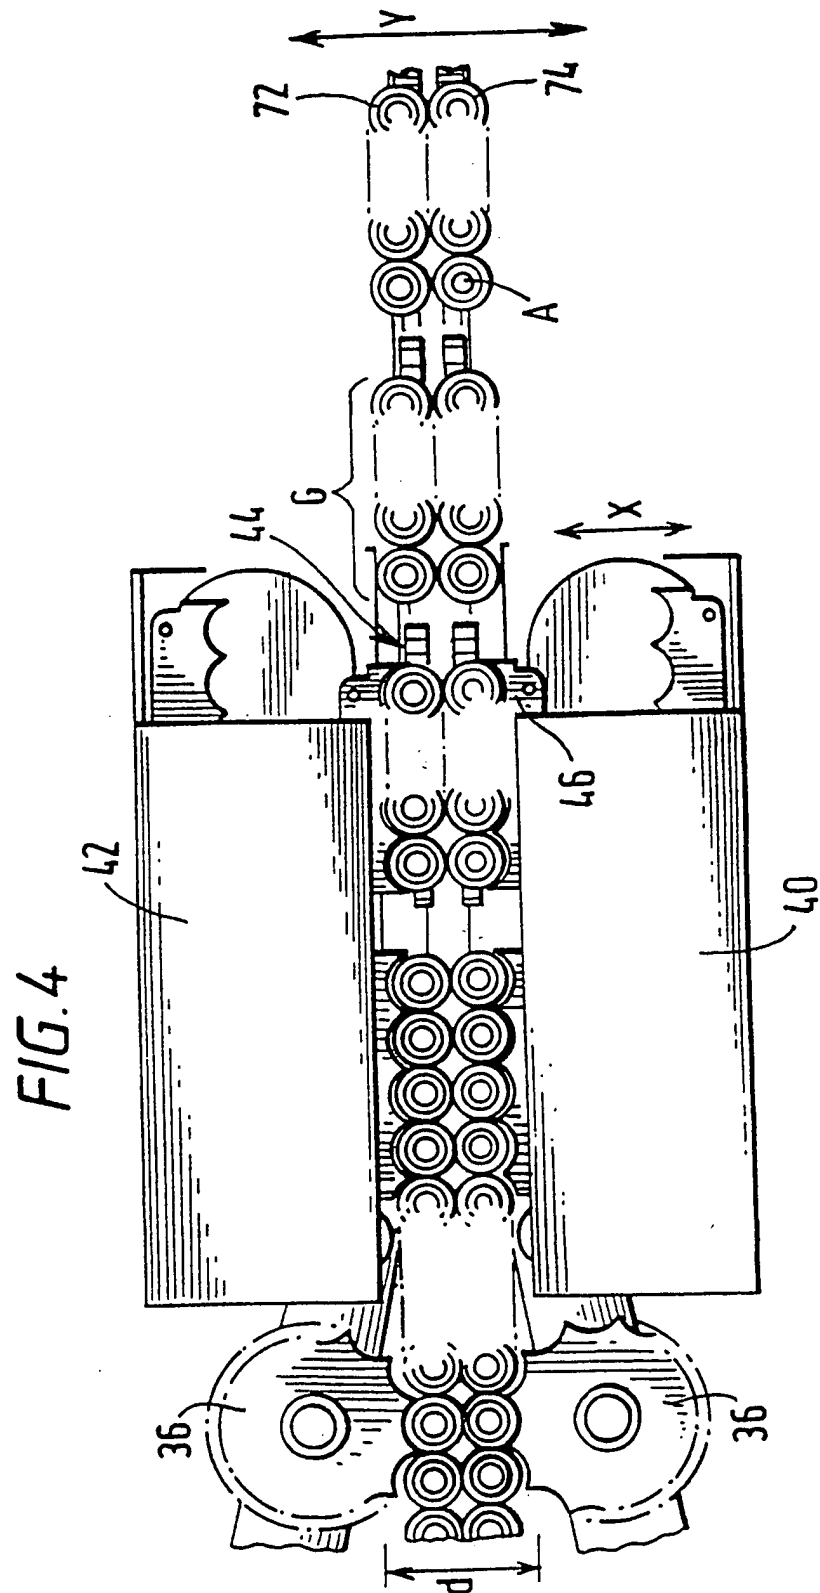

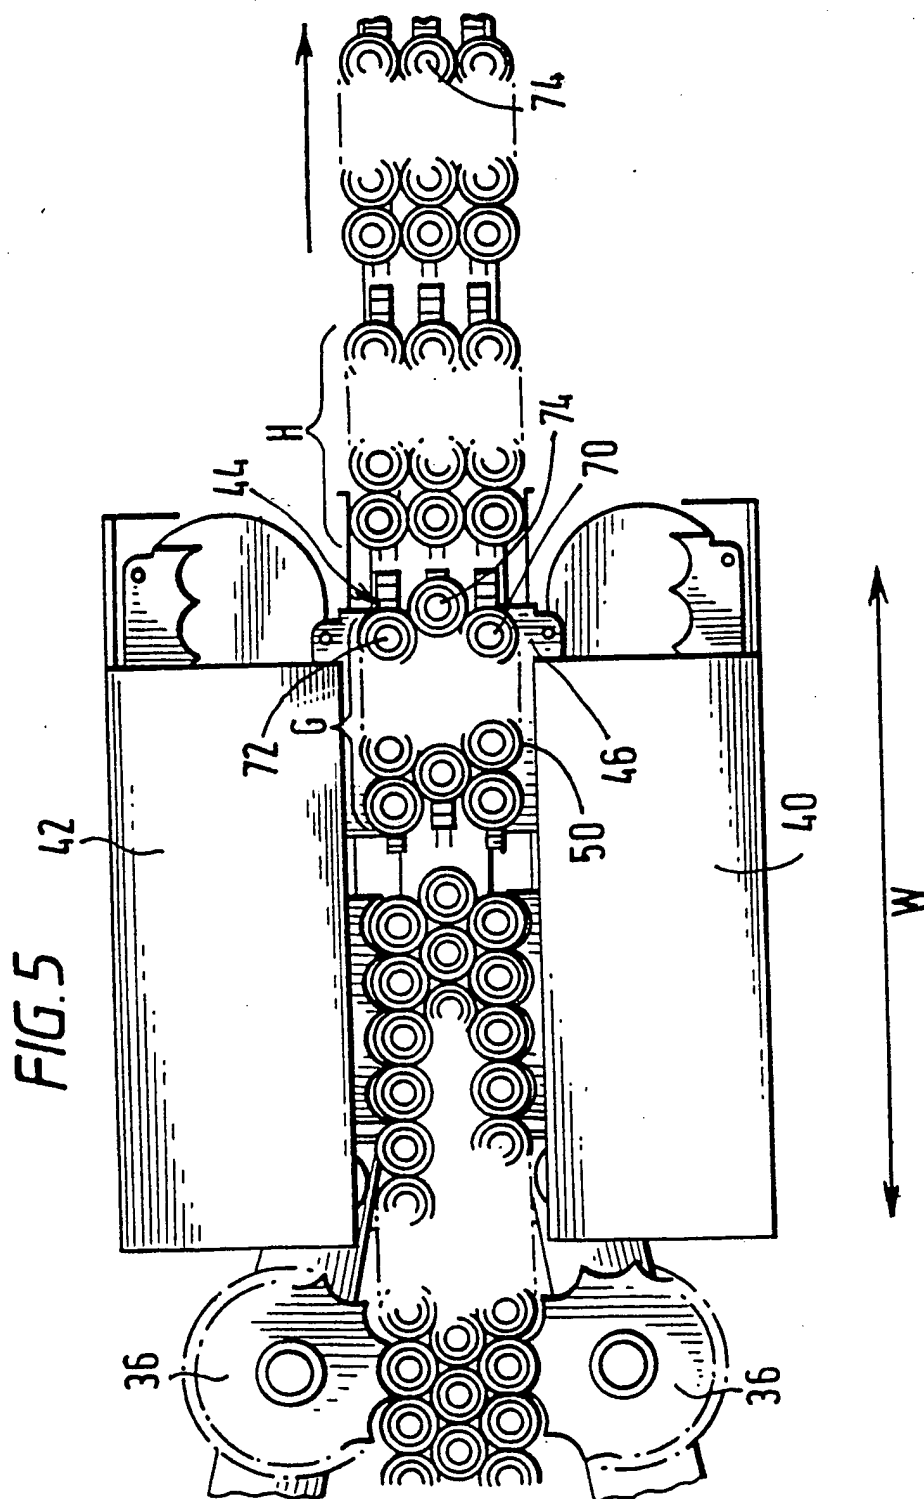

INTERNATIONAL SEARCH REPORT

Inte onal Application No
PCT/US 98/19651

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 B65B21/06 B65G47/08 B65G37/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 B65B B65G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	EP 0 708 028 A (RIVERWOOD INT CORP) 24 April 1996 see the whole document ---	1,2,6,,7, 10,11 9
X	DE 195 05 997 A (4 P NICOLAUS KEMPTEN GMBH) 22 August 1996 see the whole document ---	1,2,7,8, 10,11
X A	EP 0 126 553 A (MEAD CORP) 28 November 1984 cited in the application see the whole document -----	1,2,10 9

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

*** Special categories of cited documents :**

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

4 December 1998

Date of mailing of the international search report

14/12/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Béraud, F

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 98/19651

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0708028 A	24-04-1996	AT 169581 T DE 69504003 D US 5638665 A	15-08-1998 17-09-1998 17-06-1997
DE 19505997 A	22-08-1996	NONE	
EP 0126553 A	28-11-1984	AU 568129 B AU 2706784 A CA 1211067 A HK 70892 A IE 56387 B JP 1731687 C JP 4013208 B JP 59199415 A US 4591043 A	17-12-1987 25-10-1984 09-09-1986 25-09-1992 17-07-1991 29-01-1993 09-03-1992 12-11-1984 27-05-1986